xcite LED Lighting
Data Sheet

Order Code: WP25NWM3

62W - 1500mm Twin Body Weatherproof - IP65 - 3hrs Maintained Emergency - 4000K



Features

- Ideal for replacement of linear fluorescent fixtures
- Up to 118 lumens per watt efficacy

Construction

- Polycarbonate body
- Supplied with opal diffuser
- Integral emergency option available
- Stainless steel fixing clips
- Supplied as standard with neutral white [4000K] LED

Note: This luminaire is not suitable for all chemical environments, please contact us for advice if this luminaire may be exposed to, oil, grease, solvents, acids, alkaline or any similar chemicals.

4000K | 50,000 HOURS | 5YRS WARRANTY | ONSITE 1 YR WARRANTY | IP65 | IK08 | M3

Technical Data

General

Luminaire Wattage (W)	62
Weight (kg)	3.35

Light Output

Lumens (lm)	7300
Efficacy (lm/W)	118

LED

CCT (K)	4000

Driver

Driver Current (mA)	125

Electrical

Power Factor (pf)	0.9
Inrush Current Peak (A)	1
Surge Protection (kV)	2
Conductor Size (mm)	2.5
Terminal Type	4 pole piano key

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: WP25NWM3

62W - 1500mm Twin Body Weatherproof - IP65 - 3hrs Maintained Emergency - 4000K

Dimensions

A (mm)	1565
B (mm)	155
C (mm)	106

Line Drawing

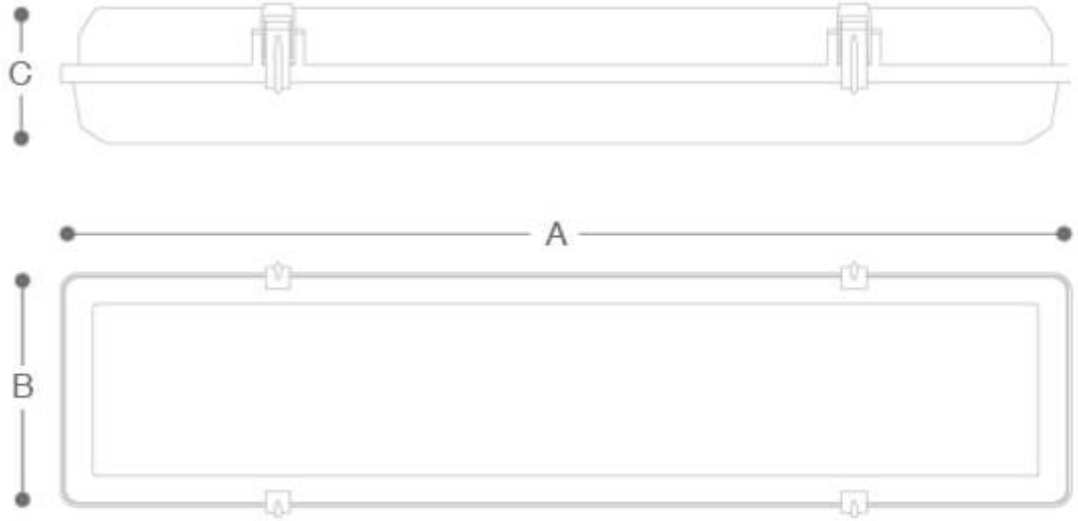

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Generated on: 12/11/2026 1:16pm
Produced by xcite LED Lighting