xcite LED Lighting
Data Sheet

Order Code: XCBH12CTM3HFSPC

12W - Circular Bulkhead - IP65 - Microwave Sensor - 3hrs Maintained Emergency - CCTK Selector [3000K/4000K/6000K] - Polished Chrome



Features

- Ideal for retrofit of existing 2D fixtures
- Suitable for bathrooms or storerooms
- Microwave movement sensor available
- CCT selectable via selector switch [3000K/4000K/6000K]
- Up to 92 lumens per watt efficacy

Construction

- Polycarbonate body
- Polished Chrome finish available
- Integral emergency option available

Technical Data

General

Luminaire Wattage (W)	12
Weight (kg)	1.20
Operating Temperature (ta °C)	5 to 25

Light Output

Lumens (lm)	1000 to 1100
Efficacy (lm/W)	92

LED

CCT (K)	3000K/4000K/6000K
CRI	80
Macadam Elipses	4

Emergency

Emergency Lumen Operating	140
Emergency Wattage (W)	2

Electrical

Rated Input Current (A)	0.07
Power Factor (pf)	0.7
Input Voltage Range (VAC)	220-240
Inrush Current Peak (A)	10
Surge Protection (kV)	1
Conductor Size (mm)	2.5
Terminal Type	4 pole screw down

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCBH12CTM3HFSPC

12W - Circular Bulkhead - IP65 - Microwave Sensor - 3hrs Maintained Emergency - CCTK Selector [3000K/4000K/6000K] - Polished Chrome

Dimensions

C (mm)	110
Dia. (mm)	330

Line Drawing

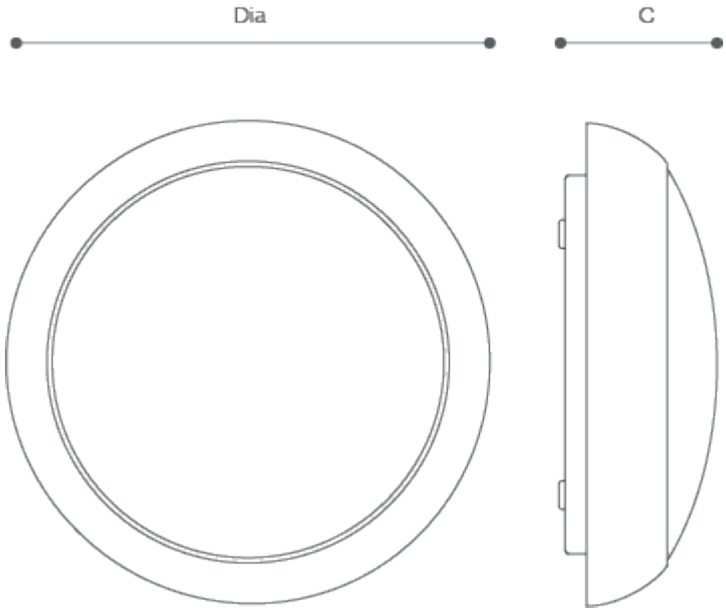

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk