xcite LED Lighting
Data Sheet

Order Code: XCBHCWPX1

X1 Bulkhead WP - Circular - Prismatic diffuser - CCT [3000K/4000K/6000K] + Wattage Selectable - White



Features

- Suitable for exterior commercial and industrial applications
- Wattage selectable via selector switch [8W/12W/16W]
- CCT selectable via selector switch [3000K/4000K/6000K]

Construction

- Modular emergency and microwave sensor's available for quick and easy conversion of a standard fitting
- For additional control, please use X1 Bulkhead Remote [Sold Separately]

Installation Notes

3-point screw fixing
Conduit side entry points for surface mount cable entry
Loop-in, loop-out push-fit terminal block for quick tool-free instalation

Technical Data

General

Luminaire Wattage (W)	8W/12W/16W
Weight (kg)	0.69
Operating Temperature (ta °C)	0° to 25°

Light Output

Lumens (lm)	1200 to 2120
Efficacy (lm/W)	155

LED

CCT (K)	3000K/4000K/6000K
CRI	80
Macadam Elipses	0.9 to 1.4

Driver

Driver Current (mA)	140/215/280
Forward Voltage (V)	48.5 to 52.5

Electrical

Rated Input Current (A)	0.04 to 0.08
Power Factor (pf)	0.82 to 0.92
Input Voltage Range (VAC)	198 to 264
Inrush Current Peak (A)	19.1
Surge Protection (kV)	1
Conductor Size (mm)	0.5 to 2.5
Terminal Type	4 pole piano key

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting
Data Sheet


Order Code: XCBHCWPX1

X1 Bulkhead WP - Circular - Prismatic diffuser - CCT [3000K/4000K/6000K] + Wattage Selectable - White

Dimensions

C (mm)	85
Dia. (mm)	282

Line Drawing

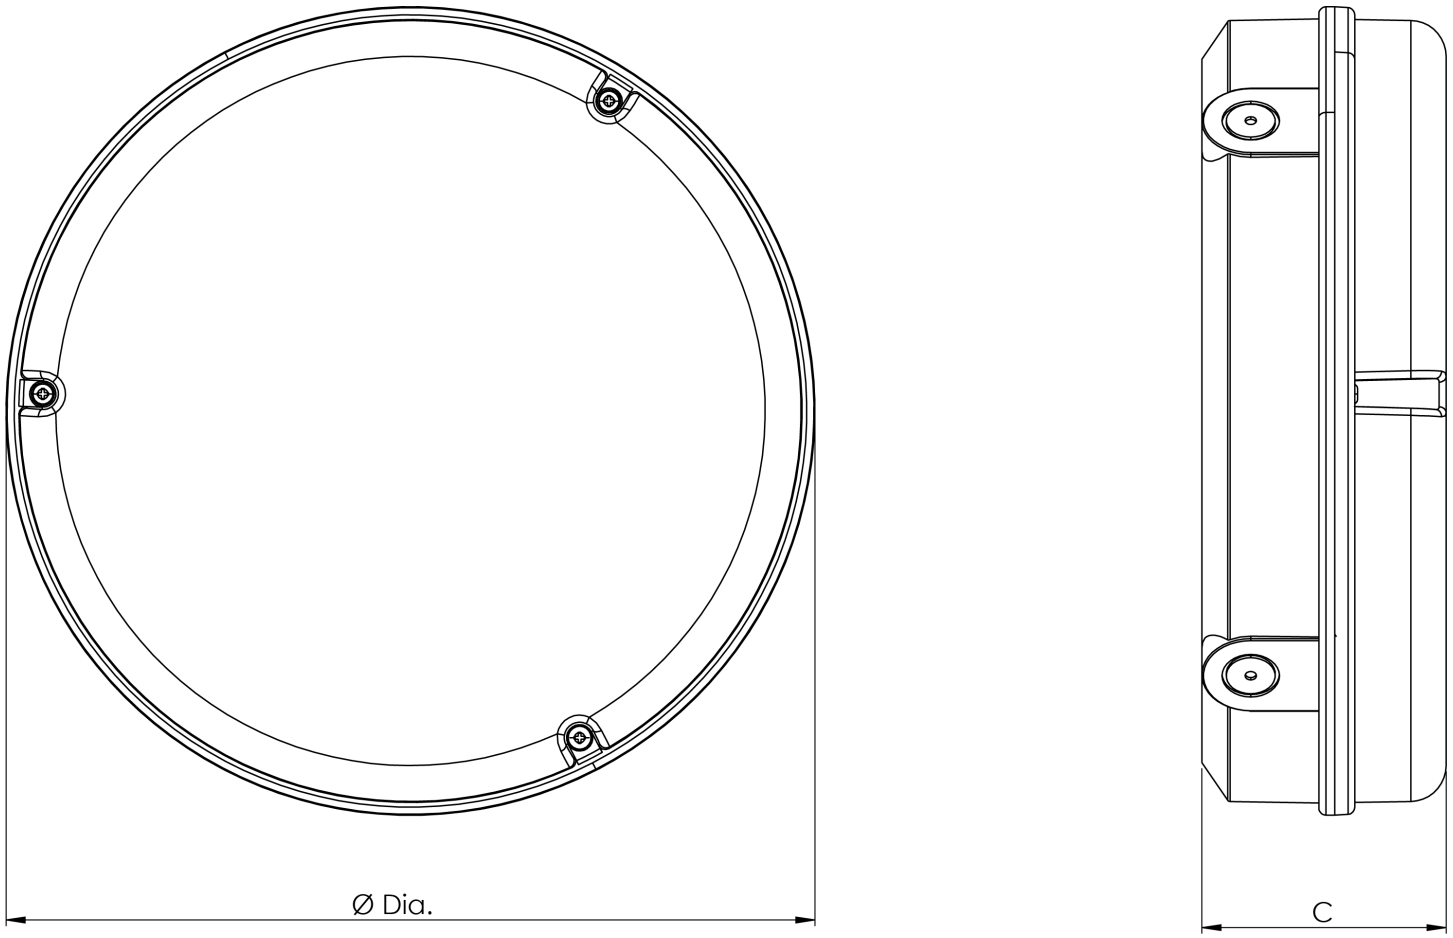

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk