# xcite LED Lighting
## Data Sheet

**Order Code:** XCBLC5CTD

5W - Downlight BL CC - CCTK Selector [3000K/4000K/6000K]- Dimmable



### Features

- Suitable for general domestic and commercial use
- CCT selectable via selector switch [3000K/4000K/6000K]
- Available in 6 sizes
- Available in 6 different outputs
- Phase cut dimming option available
- 3 hours emergency maintained with compatible conversion box Emergency Kit
- Up to 70 lumens per watt efficacy

### Construction

- Frosted polycarbonate diffuser




## Technical Data

### General

| | |
|---|---|
| Luminaire Wattage (W) | 5 |
| Weight (kg) | 0.10 |
| Operating Temperature (ta °C) | 0 to 25 |

### Light Output

| | |
|---|---|
| Lumens (lm) | 350 |
| Efficacy (lm/W) | 70 |

### LED

| | |
|---|---|
| CCT (K) | 3000K/4000K/6000K |
| CRI | 80 |
| Macadam Elipses | 4 |

### Driver

| | |
|---|---|
| Driver Current (mA) | 150 |
| Forward Voltage (V) | 27-42 |

### Electrical

| | |
|---|---|
| Rated Input Current (A) | 0.04 |
| Power Factor (pf) | 0.9 |
| Input Voltage Range (VAC) | 198-264 |
| Inrush Current Peak (A) | 1 |
| Surge Protection (kV) | 1 |
| Conductor Size (mm) | 0.75 - 1.5 mm² |
| Terminal Type | PUSH BUTTON 2 |

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

# xcite LED Lighting
## Data Sheet


**Order Code:** XCBLC5CTD

5W - Downlight BL CC - CCTK Selector [3000K/4000K/6000K]- Dimmable

### Dimensions

| | |
|---|---|
| C (mm) | 26 |
| Cut Out (mm) | 70 |
| Dia. (mm) | 90 |

### Line Drawing

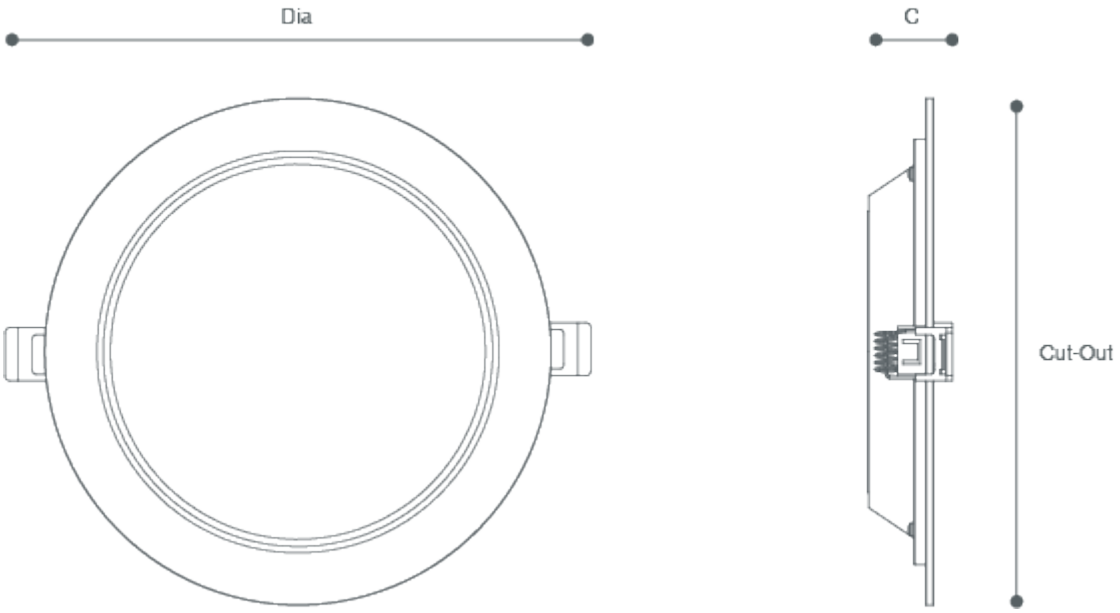


Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk