
xcite LED Lighting
Data Sheet

Order Code: XCCDL3CTSN

CIRCULAR CABINET LIGHT CC XCCDL - Satin Nickel - 3W - 3000K-4000K - Fixed output

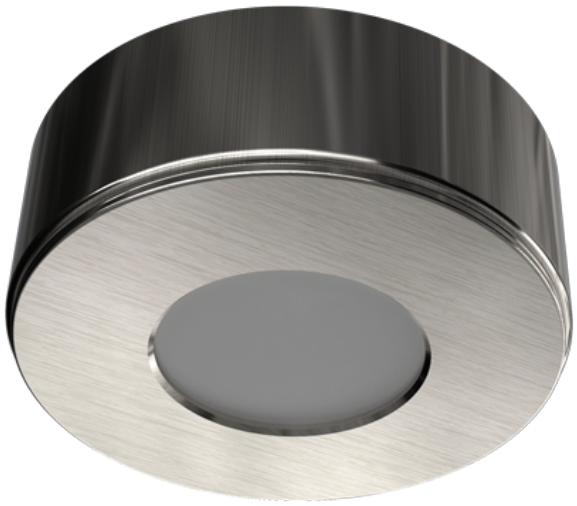

Features

- Suitable for kitchen or wardrobe applications
- LED circular under cabinet downlight
- Can be surface or flush/recessed mounted
- Complete with 1.5m of mains, 2 core cable
- CCT selectable via 2-way selector switch [3000K/4000K]

Construction

- Pressed steel body
- Frosted polycarbonate diffuser
- Integral driver circuitry with mains input

3000K 4000K | 50,000 HOURS | 3YRS WARRANTY | IP20 | IK08

Technical Data

General

Luminaire Wattage (W)	3
Weight (kg)	0.17
Operating Temperature (ta °C)	-20 to 50

Light Output

Lumens (lm)	240
Efficacy (lm/W)	80

LED

CCT (K)	3000K/4000K
CRI	80
Macadam Elipses	<5

Driver

Driver Current (mA)	120
Forward Voltage (V)	18

Electrical

Rated Input Current (A)	0.03
Power Factor (pf)	0.42
Input Voltage Range (VAC)	220-240
Inrush Current Peak (A)	110
Surge Protection (kV)	0.5kV
Conductor Size (mm)	0.5
Terminal Type	2 core flex

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk


Order Code: XCCDL3CTSN

CIRCULAR CABINET LIGHT CC XCCDL - Satin Nickel - 3W - 3000K-4000K - Fixed output

Dimensions

C (mm)	27
Fix	48
Dia. (mm)	73

Line Drawing

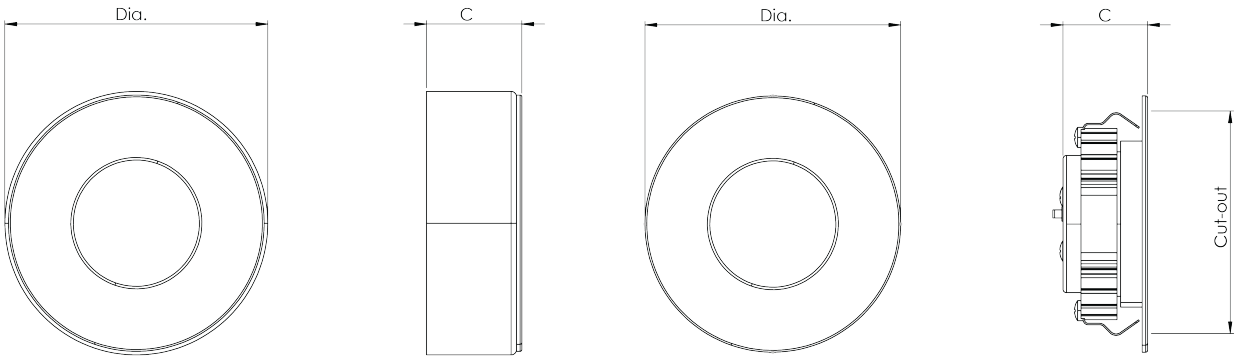

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk