xcite LED Lighting
Data Sheet

Order Code: XCDK5CT

4W 5-Way Decking Light Kit - CCTK Selector [3000K/4000K]



Features

- Suitable for garden decking and walkways
- Available as 5-way or 10-way kit
- Choice of 6000K or CCTK [3000K/4000K] adjustable
- Adjustment via twist and locking loom system
- Up to 38 lumens per watt efficacy

Construction

- Polished stainless steel [Grade #304] trim with polycarbonate cover
- Supplied with outdoor IP67 LED Driver

3000K 4000K | 6000K | 50,000 HOURS | 3YRS WARRANTY | IP67 | IK07

Technical Data

General

Luminaire Wattage (W)	4
Weight (kg)	0.30
Operating Temperature (ta °C)	0 to 25

Light Output

Lumens (lm)	150
Efficacy (lm/W)	38

LED

CCT (K)	3000-4000
CRI	>80
Macadam Elipses	5.5

Driver

Driver Current (mA)	660mA
Forward Voltage (V)	12V

Electrical

Rated Input Current (A)	0.04
Power Factor (pf)	0.46
Input Voltage Range (VAC)	110-240V
Inrush Current Peak (A)	35.32
Surge Protection (kV)	2

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting
Data Sheet


Order Code: XCDK5CT

4W 5-Way Decking Light Kit - CCTK Selector [3000K/4000K]

Dimensions

A (mm)	10025
B (mm)	1500
C (mm)	2225
E (mm)	26
Cut Out (mm)	22
Dia. (mm)	30

Line Drawing

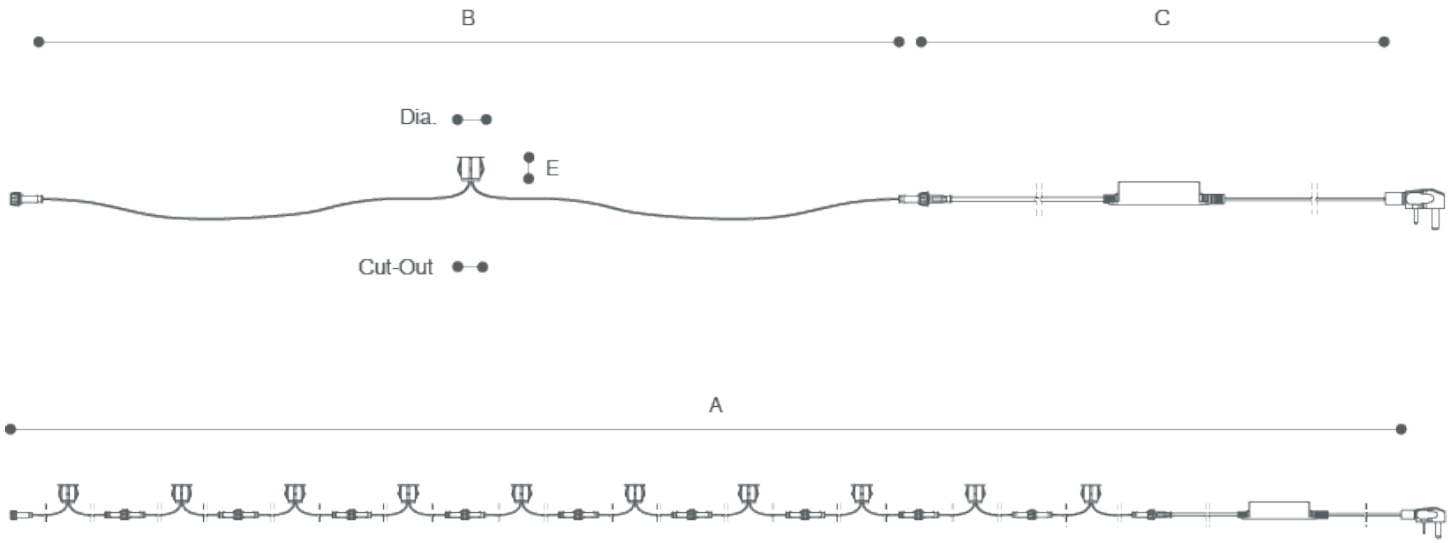

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk