# xcite LED Lighting
## Data Sheet

**Order Code:** XCDL22DL

22W - Downlight Ultra Slim Low Profile - IP20 - 6000K



### Features

- Ideal for retrofit of existing CFL Fixtures
- Suitable for general circulation areas
- Available in 6 sizes
- Edge-lit LED array with ultra slim profile
- 3 hours emergency maintained with compatible conversion box Emergency Kit
- Up to 102 lumens per watt efficacy

### Construction

- Die-cast aluminium body
- Opal polystyrene diffuser - TP[b]
- Plug and play driver
- Available in warm white [3000K], neutral white [4000K] or daylight [6000K]

3000K 4000K 6000K 50,000 HOURS 3YRS WARRANTY IP20 IK03

## Technical Data

### General

| | |
|---|---|
| Luminaire Wattage (W) | 22 |
| Weight (kg) | 0.73 |
| Operating Temperature (ta °C) | 0 to 25 |

### Light Output

| | |
|---|---|
| Lumens (lm) | 2250 |
| Efficacy (lm/W) | 102 |

### LED

| | |
|---|---|
| CCT (K) | 6000 |
| CRI | 80 |
| Macadam Elipses | 4 |

### Driver

| | |
|---|---|
| Driver Current (mA) | 550 |
| Forward Voltage (V) | 28-31 |

### Electrical

| | |
|---|---|
| Rated Input Current (A) | 0.1 |
| Power Factor (pf) | 0.9 |
| Input Voltage Range (VAC) | 200-240 |
| Inrush Current Peak (A) | 6.63 |
| Surge Protection (kV) | 2 |
| Conductor Size (mm) | 1.5 |
| Terminal Type | 2 pole grip wire |

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

# xcite LED Lighting

## Data Sheet


**Order Code:** XCDL22DL

22W - Downlight Ultra Slim Low Profile - IP20 - 6000K

### Dimensions

| | |
|---|---|
| C (mm) | 25 |
| Cut Out (mm) | 280 |
| Dia. (mm) | 296 |

### Line Drawing

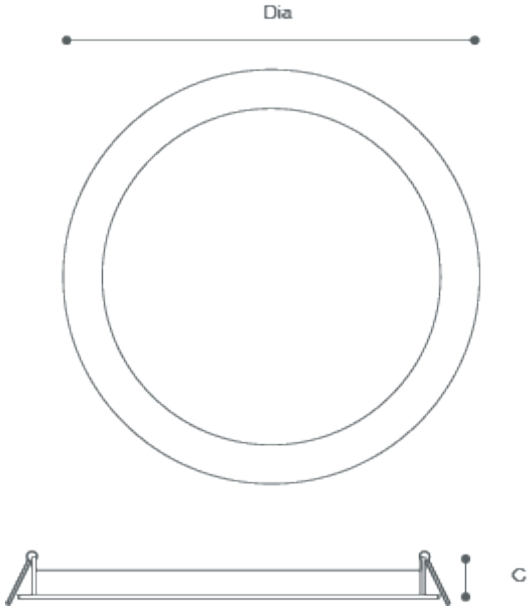


Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk