xcite LED Lighting
Data Sheet

Order Code: XCDRV24100D

100W - 24V LED Strip Driver - Phase cut dimming



Features

- 24V LED Driver for XCITE LED Strip Reels
- Short circuit and overload protection
- Fixed output models available [Non-Dimmable]
- Dimmable model available

50,000 HOURS | 3YRS WARRANTY | IP20 | DIMMABLE

Technical Data

General

Weight (kg)	0.48
Operating Temperature (ta °C)	0° to 25°

Driver

Driver Current (mA)	0.42 to 4.17A
Forward Voltage (V)	24

Electrical

Rated Input Current (A)	0.36
Power Factor (pf)	0.9
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	75
Conductor Size (mm)	0.5 to 2.5
Terminal Type	SCREW

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCDRV24100D

100W - 24V LED Strip Driver - Phase cut dimming

Dimensions

A (mm)	195
B (mm)	68
C (mm)	31

Line Drawing

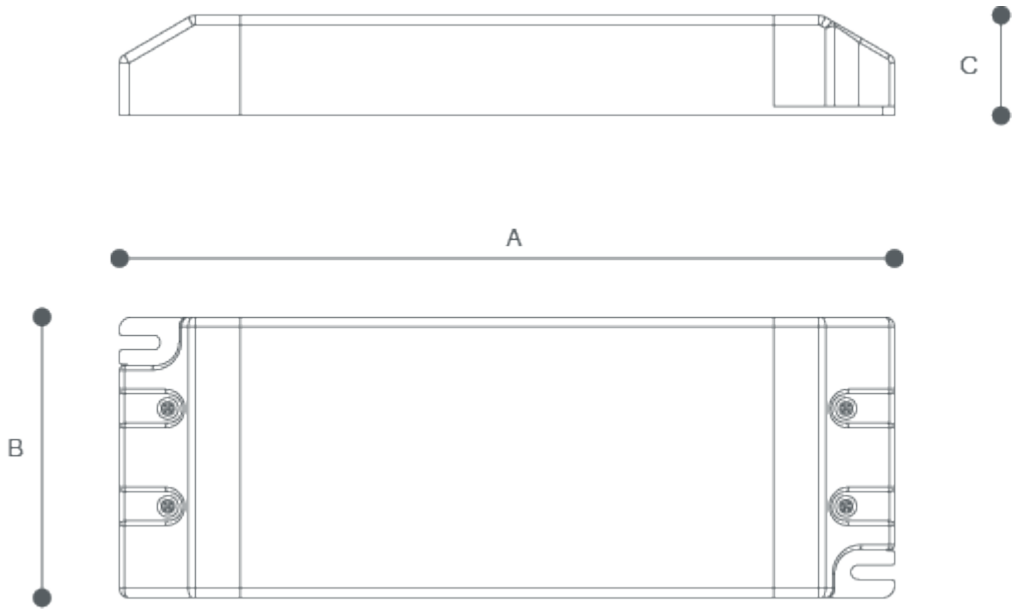

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Generated on: 12/11/2026 1:25pm
Produced by xcite LED Lighting