xcite LED Lighting
Data Sheet

Order Code: XCDRV24150

150W - 24V LED Strip Driver - Non-Dimmable



Features

- 24V LED Driver for XCITE LED Strip Reels
- Short circuit and overload protection
- Fixed output models available [Non-Dimmable]
- Dimmable model available

50,000 HOURS | 3YRS WARRANTY | IP20 | DIMMABLE

Technical Data

General

Luminaire Wattage (W)	150
Weight (kg)	0.30
Operating Temperature (ta °C)	-20° to 45°

Driver

Driver Current (mA)	0 - 4.16 max
Forward Voltage (V)	24

Electrical

Rated Input Current (A)	0.6
Power Factor (pf)	0.98
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	60
Surge Protection (kV)	1
Conductor Size (mm)	0.5 to 2.5
Terminal Type	SCREW

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCDRV24150

150W - 24V LED Strip Driver - Non-Dimmable

Dimensions

A (mm)	180
B (mm)	63
C (mm)	30

Line Drawing

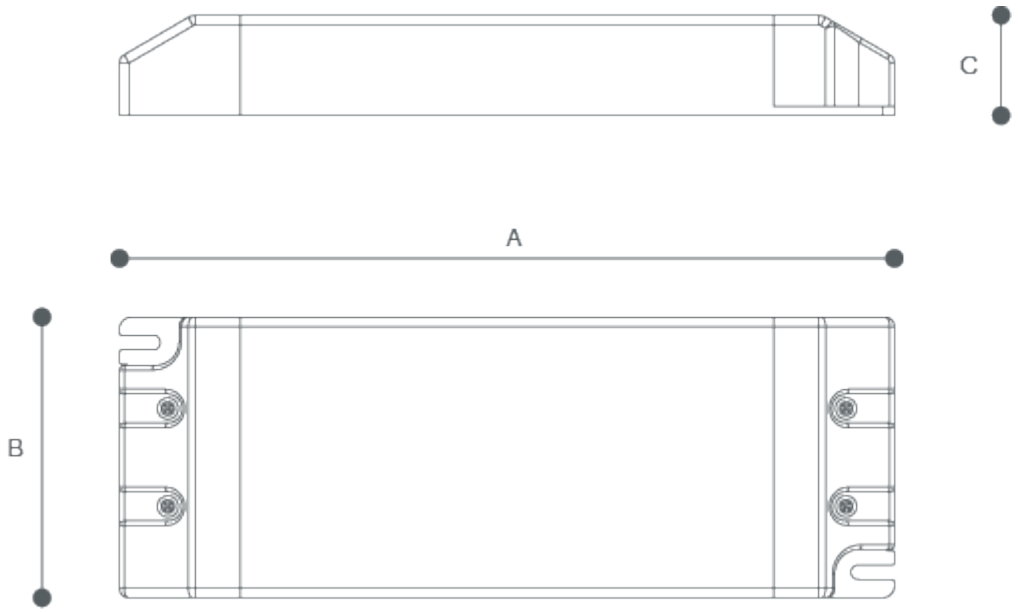

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Generated on: 12/11/2026 1:24pm
Produced by xcite LED Lighting