
xcite LED Lighting
Data Sheet

Order Code: XCDRV2436

36W - 24V LED Strip Driver - fixed output

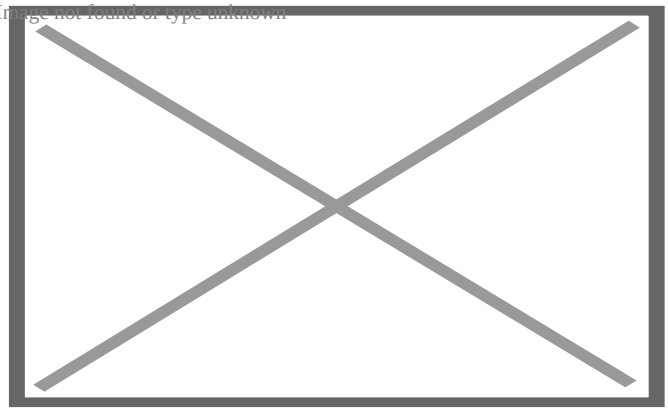

Features

- 24V LED Driver for XCITE LED Strip Reels
- Short circuit and overload protection
- Fixed output models available [Non-Dimmable]
- Dimmable model available

Technical Data

General

Weight (kg)	0.22
Operating Temperature (ta °C)	-20° to 45°

Driver

Driver Current (mA)	0 to 1.5 max
Forward Voltage (V)	24

Electrical

Rated Input Current (A)	0.3 max
Power Factor (pf)	0.9
Input Voltage Range (VAC)	198 to 264
Inrush Current Peak (A)	30
Surge Protection (kV)	0.5
Conductor Size (mm)	0.5 to 2.5
Terminal Type	SCREW

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCDRV2436

36W - 24V LED Strip Driver - fixed output

Dimensions

A (mm)	150
B (mm)	40
C (mm)	27

Line Drawing

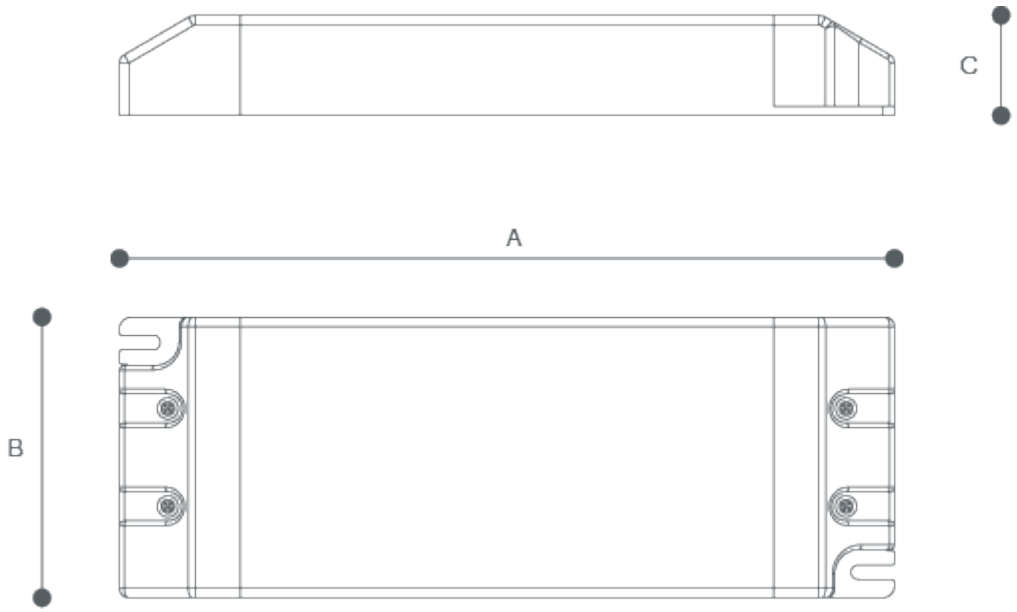

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Generated on: 12/11/2026 1:22pm
Produced by xcite LED Lighting