xcite LED Lighting
Data Sheet

Order Code: XCEMBANM3ST

XCITE EM BULKHEAD ST XCEMBA 1W - 6500K - Fixed output - non-maintained Emergency Self-test



Features

- Suitable for open areas and escape routes
- 20mm conduit side and rear cable entries for wall or ceiling fix
- Semi recessed bezel available
- Reduced maintenance and high performance
- Supplied with LiFePO4 battery

Construction

- Polycarbonate body and diffuser
- Maintained or non-maintained available
- Supplied with self adhesive universal legend
- Supplied as standard with daylight [6500K] LED
- Integral auto self-test for reduced maintenance, includes a disable function

6500K | 50,000 HOURS | 3YRS WARRANTY | IP65 | IK06 | M3 | LiFePO4

Technical Data

General

Luminaire Wattage (W)	1
Weight (kg)	0.51
Operating Temperature (ta °C)	5° to 25°

LED

CRI	70
Macadam Elipses	2.1

Driver

Driver Current (mA)	360
Forward Voltage (V)	3.4

Emergency

Emergency Lumen Operating	190
Emergency Wattage (W)	1

Electrical

Rated Input Current (A)	0.03
Power Factor (pf)	0.17
Input Voltage Range (VAC)	220 to 240
Conductor Size (mm)	1.5
Terminal Type	3 pole piano key

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

CE UKCA

xcite LED Lighting

Data Sheet


Order Code: XCEMBANM3ST

XCITE EM BULKHEAD ST XCEMBA 1W - 6500K - Fixed output - non-maintained Emergency Self-test

Dimensions

A (mm)	352
B (mm)	110
C (mm)	65

Line Drawing

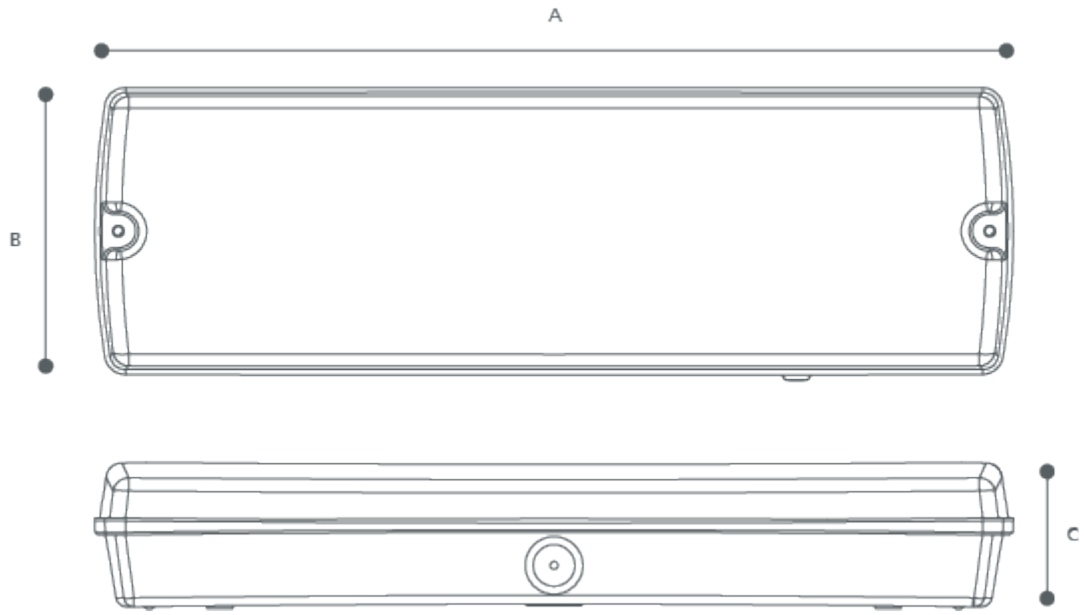

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk