
# xcite LED Lighting
## Data Sheet

**Order Code:** XCFRRSN

GU10 - Fire Rated Recessed Ring Downlight - Lampholder - Satin Nickel

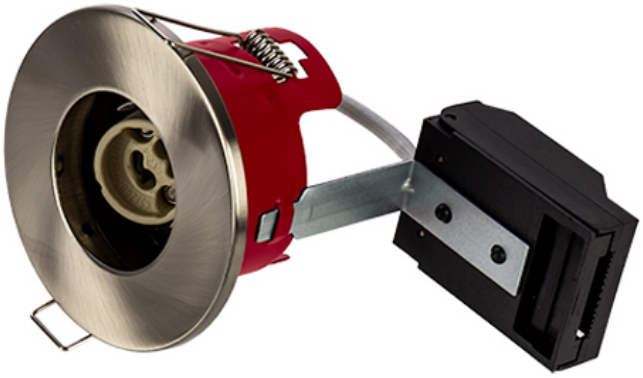

### Features

- Ideal for retrofit of existing halogen downlight fixtures
- Available in 3 different coloured bezels
- Lamps sold separately
- 30, 60 & 90 minute fire rating with solid timber joists
- 30 minute fire rating with Staircraft I-Joist [Compatibility Matrix]
- FIXED, Tilt and IP65 Shower version available

### Construction

- Steel body providing a high level of fire protection in accordance with Building Regulations Part B
- Supplied with GU10 lampholder and bracket

## Technical Data

### General

| | |
|---|---|
| Luminaire Wattage (W) | 50 |
| Weight (kg) | 1.72 |

### Electrical

| | |
|---|---|
| Input Voltage Range (VAC) | 230 |

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

# xcite LED Lighting

## Data Sheet


**Order Code:** XCFRRSN

GU10 - Fire Rated Recessed Ring Downlight - Lampholder - Satin Nickel

### Dimensions

| | |
|---|---|
| C (mm) | 94 |
| Cut Out (mm) | 68 |
| Dia. (mm) | 85 |

### Line Drawing

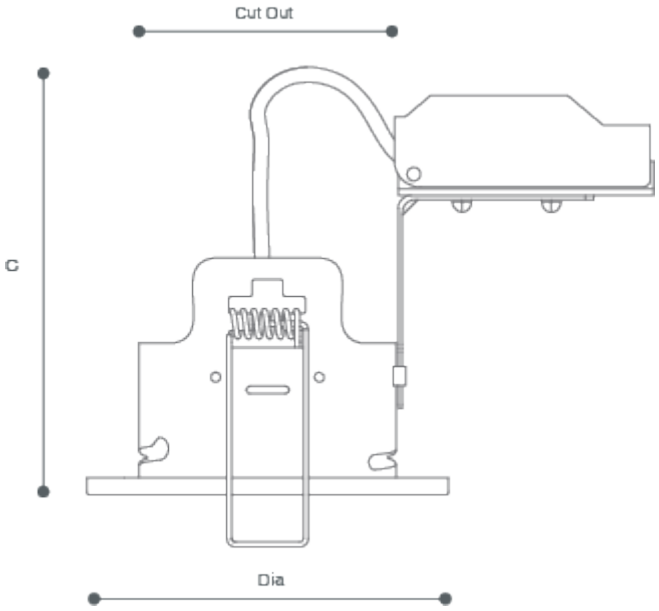


Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk