
xcite LED Lighting
Data Sheet

Order Code: XCFRSSN

GU10 - Fire Rated Recessed Ring Shower Downlight - IP65 - Lampholder - Satin Nickel

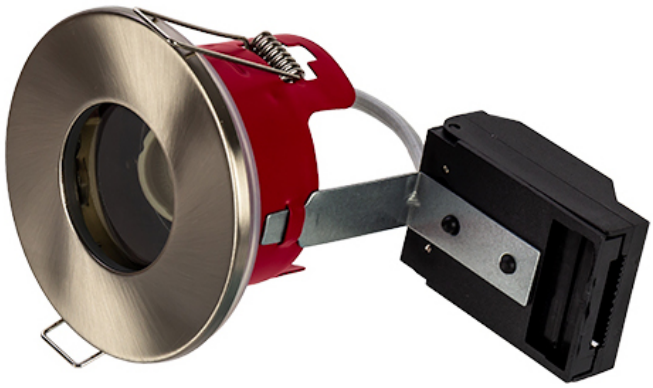

Features

- Ideal for retrofit of existing halogen downlight fixtures
- Available in 3 different coloured bezels
- Lamps sold separately
- 30, 60 & 90 minute fire rating with solid timber joists
- 30 minute fire rating with Staircraft I-Joist and METAL WEB Joist [Compatibility Matrix]
- Fixed, Tilt and IP65 SHOWER version available

Construction

- Steel body providing a high level of fire protection in accordance with Building Regulations Part B
- Loop in/out mains connector
- Supplied with GU10 lampholder and bracket

Technical Data

General

Weight (kg)	0.30

Electrical

Input Voltage Range (VAC)	230

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCFRSSN

GU10 - Fire Rated Recessed Ring Shower Downlight - IP65 - Lampholder - Satin Nickel

Dimensions

C (mm)	96
Cut Out (mm)	68
Dia. (mm)	85

Line Drawing

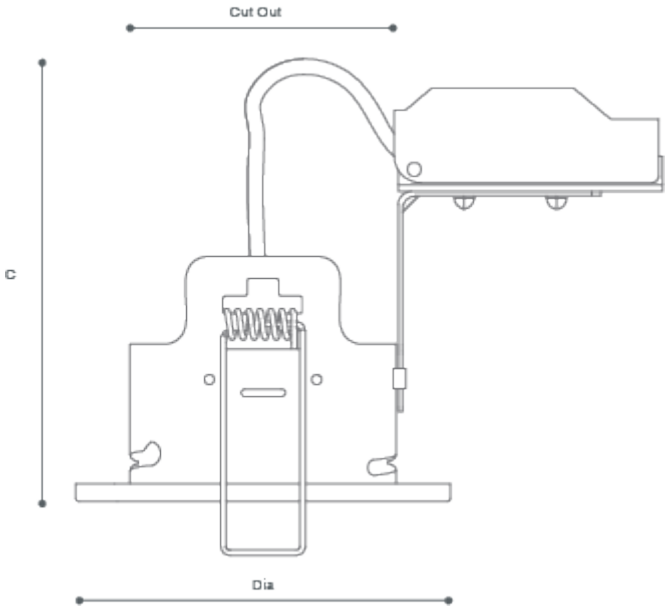

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk