
xcite LED Lighting
Data Sheet

Order Code: XCMRPC

XCITE MINI REMOTE PHOTOCELL

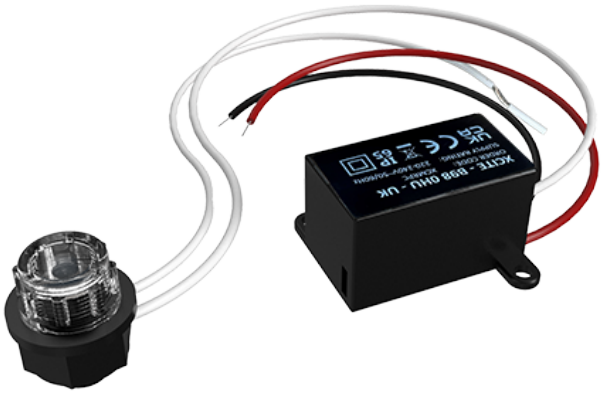

Features

- Switch on at 10-16 lux [turn off at <65 lux]
- Remote photocell option to allow for space and flexibility at install
- Suitable for switching exterior lighting circuits

Construction

- Polycarbonate body and diffuser

50,000 HOURS | 3YRS WARRANTY | IP65

Technical Data

General

Weight (kg)	0.03
Operating Temperature (ta °C)	0 to 25

Electrical

Input Voltage Range (VAC)	220 - 240
Conductor Size (mm)	1

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk


Order Code: XCMRPC

XCITE MINI REMOTE PHOTOCELL

Dimensions

A (mm)	34
B (mm)	17
C (mm)	300
D (mm)	34
Cut Out (mm)	10

Line Drawing

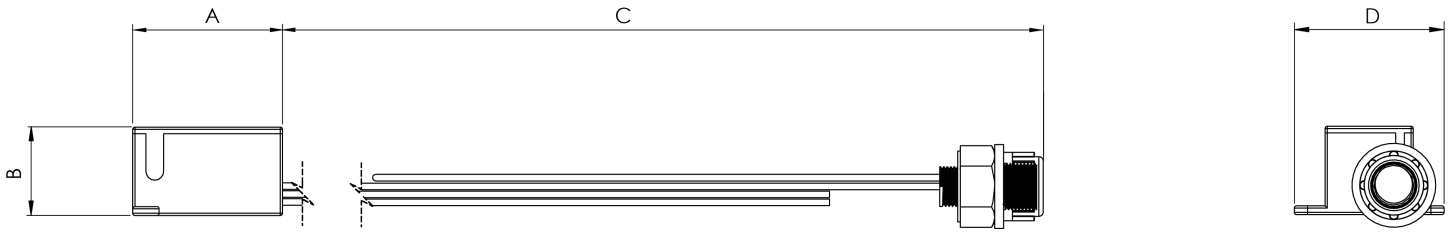

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk