xcite LED Lighting
Data Sheet

Order Code: XCNC4X1M3MS

1200mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency - Microwave sensor



Features

- Suitable for a range of commercial and industrial applications
- Available in 4 lengths [2ft, 4ft, 5ft, and 6ft]
- CCT selectable via selector switch [3000K/4000K/6000K]
- Wattage selectable via 2-way dip switch [21W/26W/31W/36]
- Position adjustable mounting clips
- Stainless steel retainer clips for diffuser with anti-tamper screw

Construction

- Grey polycarbonate body
- Weatherproof IP65 construction
- Pre-assembled emergency and sensor luminaires available

Installation Notes

Conduit and BESA fixing points for end or rear cable entry
Loop in/out push-fit terminal block for quick installation

Technical Data

General

Luminaire Wattage (W)	21W/26W/31W/36
Weight (kg)	2.27
Operating Temperature (ta °C)	+5° to +25°

Light Output

Lumens (lm)	3500 - 5900
Efficacy (lm/W)	164

LED

CCT (K)	3000K/4000K/6000K
CRI	80
Macadam Elipses	7.6

Driver

Driver Current (mA)	200, 250, 300, 350
Forward Voltage (V)	91.7 to 99.1Vdc

Emergency

Emergency Lumen Operating	327
Emergency Wattage (W)	2

Electrical

Rated Input Current (A)	0.1 to 0.17
Power Factor (pf)	0.93 to 0.97
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	32A
Surge Protection (kV)	1
Conductor Size (mm)	0.5 to 2.5
Terminal Type	4 pole piano key

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCNC4X1M3MS

1200mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency - Microwave sensor

Dimensions

A (mm)	1275
B (mm)	95
C (mm)	80
Fix	600

Line Drawing

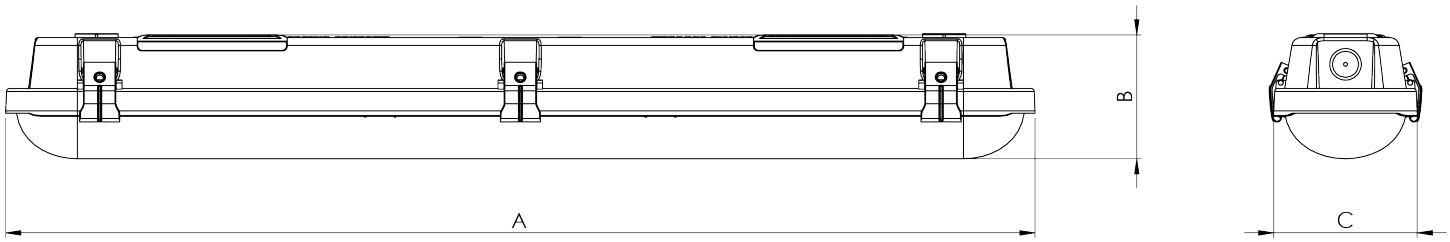

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Generated on: 12/11/2026 1:32pm
Produced by xcite LED Lighting