xcite LED Lighting
Data Sheet

Order Code: XCNC5X1M3

1500mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency



Features

- Suitable for a range of commercial and industrial applications
- Available in 4 lengths [2ft, 4ft, 5ft, and 6ft]
- CCT selectable via selector switch [3000K/4000K/6000K]
- Wattage selectable via 2-way dip switch [29W/36W/43W/50]
- Position adjustable mounting clips
- Stainless steel retainer clips for diffuser with anti-tamper screw

Construction

- Grey polycarbonate body
- Weatherproof IP65 construction
- Modular emergency pack and microwave sensor's available for quick and easy conversion of a standard fitting
- Pre-assembled emergency and sensor luminaires available

Installation Notes

Conduit and BESA fixing points for end or rear cable entry
Loop in/out push-fit terminal block for quick installation

Technical Data

General

Luminaire Wattage (W)	29W/36W/43W/50
Weight (kg)	2.45
Operating Temperature (ta °C)	+5° to +25°

Light Output

Lumens (lm)	4700 - 7900
Efficacy (lm/W)	162

LED

CCT (K)	3000K/4000K/6000K
CRI	80
Macadam Elipses	6.5

Driver

Driver Current (mA)	200, 250, 300, 350
Forward Voltage (V)	124 to 134.1Vdc

Emergency

Emergency Lumen Operating	327
Emergency Wattage (W)	2

Electrical

Rated Input Current (A)	0.14 to 0.24
Power Factor (pf)	0.89 to 0.95
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	45A
Surge Protection (kV)	1
Conductor Size (mm)	0.5 to 2.5
Terminal Type	4 pole piano key

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCNC5X1M3

1500mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency

Dimensions

A (mm)	1570
B (mm)	95
C (mm)	80
Fix	600

Line Drawing

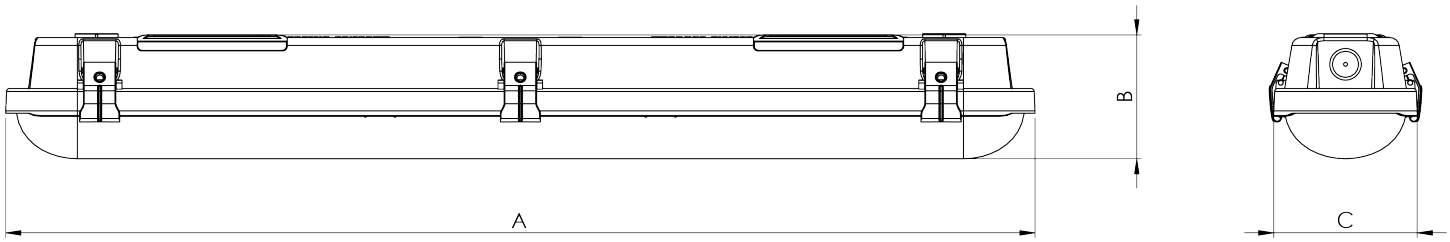

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk