xcite LED Lighting
Data Sheet

Order Code: XCNC6X1M3MS

1800mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency - Microwave sensor



Features

- Suitable for a range of commercial and industrial applications
- Available in 4 lengths [2ft, 4ft, 5ft, and 6ft]
- CCT selectable via selector switch [3000K/4000K/6000K]
- Wattage selectable via 2-way dip switch [35W/44W/53W/62]
- Position adjustable mounting clips
- Stainless steel retainer clips for diffuser with anti-tamper screw

Construction

- Grey polycarbonate body
- Weatherproof IP65 construction
- Pre-assembled emergency and sensor luminaires available

Installation Notes

Conduit and BESA fixing points for end or rear cable entry
Loop in/out push-fit terminal block for quick installation

Technical Data

General

Luminaire Wattage (W)	35W/44W/53W/62
Weight (kg)	2.91
Operating Temperature (ta °C)	+5° to +25°

Light Output

Lumens (lm)	6000 - 10400
Efficacy (lm/W)	170

LED

CCT (K)	3000K/4000K/6000K
CRI	80
Macadam Elipses	8

Driver

Driver Current (mA)	200, 250, 300, 350
Forward Voltage (V)	155 to 164Vdc

Emergency

Emergency Lumen Operating	327
Emergency Wattage (W)	2

Electrical

Rated Input Current (A)	0.17 to 0.29
Power Factor (pf)	0.92 to 0.96
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	45A
Surge Protection (kV)	1
Conductor Size (mm)	0.5 to 2.5
Terminal Type	4 pole piano key

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCNC6X1M3MS

1800mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency - Microwave sensor

Dimensions

A (mm)	1875
B (mm)	95
C (mm)	80
Fix	600

Line Drawing

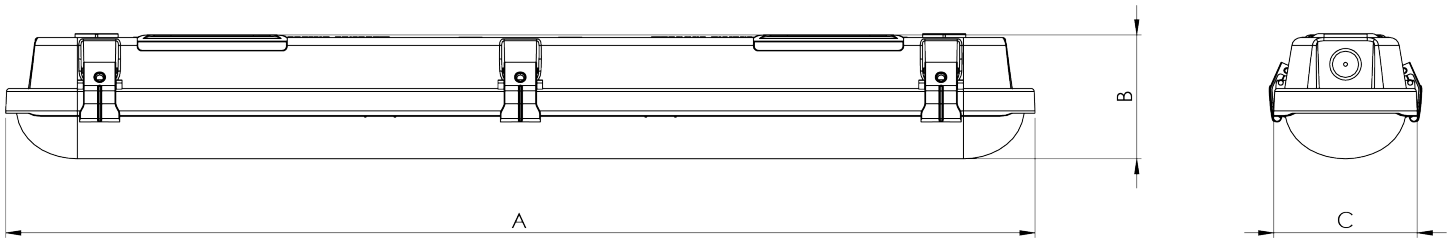

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Generated on: 12/11/2026 1:33pm
Produced by xcite LED Lighting