xcite LED Lighting
Data Sheet

Order Code: XCPL9WW

9W - Porch Light LED - Fixed Output - 3000K



Features

- Suitable for exterior walls and entrance areas
- Low energy LED module for reduced running costs
- Up to 61 lumens per watt efficacy

Construction

- Die-cast aluminium body finished in Anthracite grey
- Frosted polycarbonate diffuser
- Supplied as standard with warm white [3000K] LED

Installation Notes

Fixed via rear wall mounting plate with cable entry and wired via 3-way termination block

Technical Data

General

Luminaire Wattage (W)	9
Weight (kg)	0.70
Operating Temperature (ta °C)	0 to 25

Light Output

Lumens (lm)	550
Efficacy (lm/W)	61

LED

CCT (K)	3000
CRI	84

Driver

Driver Current (mA)	350
Forward Voltage (V)	21

Electrical

Rated Input Current (A)	0.04
Power Factor (pf)	0.94
Input Voltage Range (VAC)	198-264
Inrush Current Peak (A)	13
Surge Protection (kV)	1
Conductor Size (mm)	0.5-1.5
Terminal Type	PIANO 3

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCPL9WW

9W - Porch Light LED - Fixed Output - 3000K

Dimensions

A (mm)	180
B (mm)	135
Dia. (mm)	90

Line Drawing

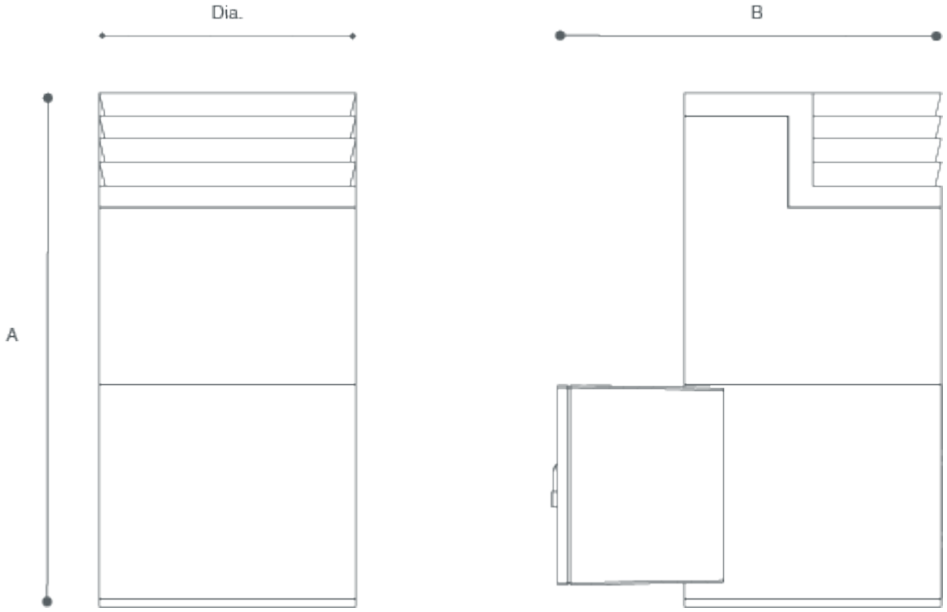

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk