# xcite LED Lighting
## Data Sheet

**Order Code:** XCSEDLA1NM3ST

XCITE EM SURFACE DOWNLIGHT ST XCSEDLA - 6500K - Fixed output - non-maintained Emergency Self-test



### Features

- Suitable for open areas and escape routes
- 20mm conduit side and rear cable entries
- Virtually service free emergency lighting
- Easy to install with simple connection wiring
- Supplied with LiFePO4 battery

### Construction

- Very low energy consumption - 1W
- Polycarbonate body
- Operates in non-maintained mode
- Internal mains connection
- Integral auto self-test for reduced maintenance

50,000 HOURS | 3YRS WARRANTY | IP20 | IK06 | LiFePO4

## Technical Data

### General

| | |
|---|---|
| Luminaire Wattage (W) | 2 |
| Weight (kg) | 0.30 |
| Operating Temperature (ta °C) | 5° to 25° |

### LED

| | |
|---|---|
| CRI | 70 |
| Macadam Elipses | 3.9 |

### Driver

| | |
|---|---|
| Driver Current (mA) | 350 |
| Forward Voltage (V) | 3.1 |

### Emergency

| | |
|---|---|
| Emergency Lumen Operating | 130 |
| Emergency Wattage (W) | 1 |

### Electrical

| | |
|---|---|
| Rated Input Current (A) | 0.02 |
| Power Factor (pf) | 0.19 |
| Input Voltage Range (VAC) | 220 to 240 |
| Conductor Size (mm) | 1.5 |
| Terminal Type | 3 pole screw down |

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

CE UKCA

# xcite LED Lighting

## Data Sheet


**Order Code:** XCSEDLA1NM3ST

XCITE EM SURFACE DOWNLIGHT ST XCSEDLA - 6500K - Fixed output - non-maintained Emergency Self-test

### Dimensions

| | |
|---|---|
| A (mm) | 170 |
| B (mm) | 120 |
| C (mm) | 45 |

### Line Drawing

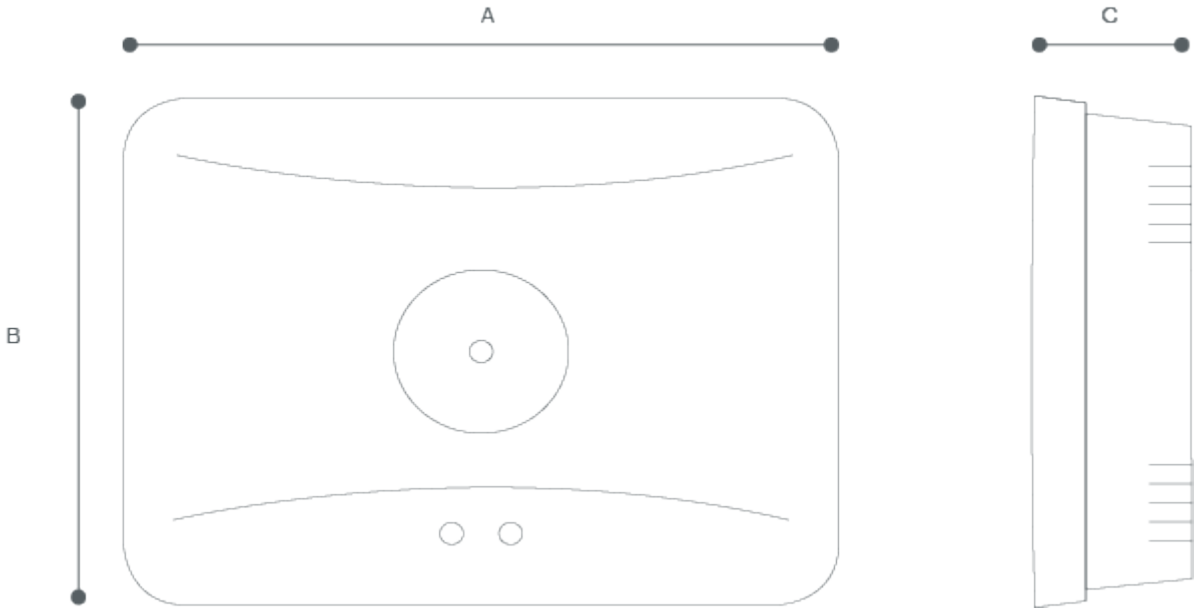


Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk