xcite LED Lighting
Data Sheet

Order Code: XCSH7WWW

7W - Shaver Light - 3000K - White



Features

- Suitable for bathrooms zone 3 where no water jet is likely to be used
- Pull cord switch
- Shaver socket with dual voltage selector switch
- Continuous power allowing shaver use when not illuminated

Construction

- Supplied as standard with warm white [3000K] LED

Installation Notes

Fixed via base plate
Wired via 3-pole terminal connection inside main body

3000K | 50,000 HOURS | 3YRS WARRANTY | IP20 | IK07

Technical Data

General

Luminaire Wattage (W)	7
Weight (kg)	0.70
Operating Temperature (ta °C)	-10 to 40

Light Output

Lumens (lm)	600
Efficacy (lm/W)	86

LED

CCT (K)	3000
CRI	80
Macadam Elipses	<4

Driver

Driver Current (mA)	350mA
Forward Voltage (V)	10.4 - 12.8

Electrical

Rated Input Current (A)	0.039
Power Factor (pf)	0.7
Input Voltage Range (VAC)	220 - 240
Inrush Current Peak (A)	25
Conductor Size (mm)	0.5 to 2.5
Terminal Type	3 pole screw down

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

CE UKCA

xcite LED Lighting

Data Sheet


Order Code: XCSH7WWW

7W - Shaver Light - 3000K - White

Dimensions

A (mm)	500
B (mm)	50
C (mm)	60

Line Drawing

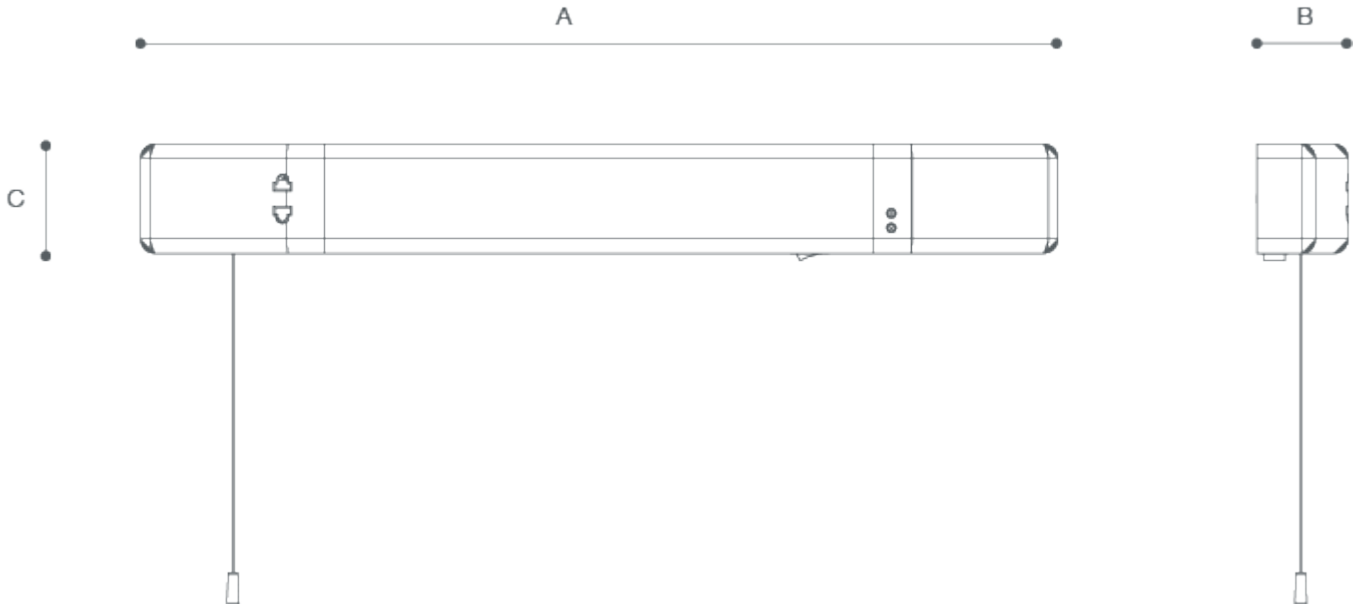

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk