xcite LED Lighting
Data Sheet

Order Code: XCSL433NWM3MS

33W - Surface module - Fixed output - Emergency - Microwave sensor - 4000K



Features

- Suitable for schools, corridors and general areas
- Available in 2 lengths and 2 outputs
- Surface mounted

Construction

- Steel body in white finish
- Opal polycarbonate diffuser
- Rear BESA fixings or side cable entry
- Supplied as standard with neutral white [4000K] LED

4000K | 50,000 HOURS | 3YRS WARRANTY | IP20 | IK04 | M3

Technical Data

General

Luminaire Wattage (W)	33
Weight (kg)	2.10
Operating Temperature (ta °C)	5 to 25

Light Output

Lumens (lm)	3900
Efficacy (lm/W)	118

LED

CCT (K)	4000
CRI	80
Macadam Elipses	<3

Driver

Driver Current (mA)	800
Forward Voltage (V)	37.5

Emergency

Emergency Lumen Operating	290

Electrical

Rated Input Current (A)	0.15
Power Factor (pf)	0.98
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	20.2
Surge Protection (kV)	1
Conductor Size (mm)	0.5 to 2.5
Terminal Type	4-POLE GRIP-WIRE

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCSL433NWM3MS

33W - Surface module - Fixed output - Emergency - Microwave sensor - 4000K

Dimensions

A (mm)	1203
B (mm)	154
C (mm)	70

Line Drawing

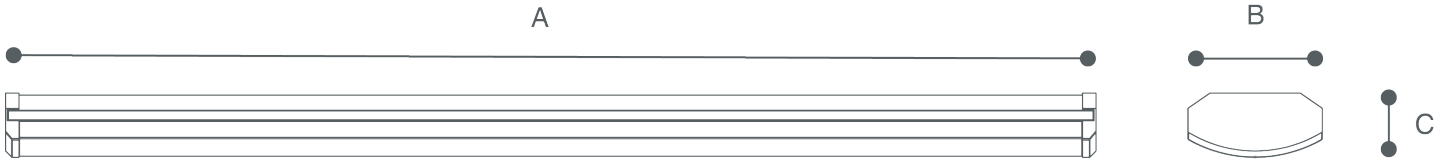

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Generated on: 12/11/2026 1:23pm
Produced by xcite LED Lighting