
xcite LED Lighting
Data Sheet

Order Code: XCTDL3CTSN

TRIANGLE CABINET LIGHT CC Cabinet/Shaver Lights 3W - 3000K-4000K

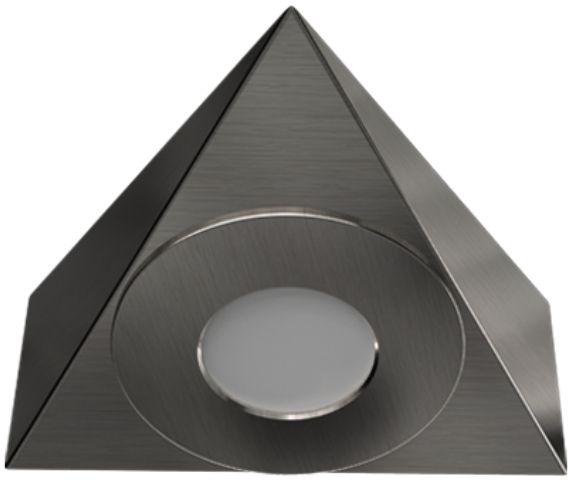

Features

- LED Triangular under cabinet downlight suitable for kitchen areas
- Surface mounted
- CCT selectable via 2-way selector switch [3000K/4000K]
- Complete with 1.5m of mains, 2 core cable

Construction

- Pressed steel body
- Frosted polycarbonate diffuser
- Integral driver circuitry with mains input

3000K 4000K | 50,000 HOURS | 3YRS WARRANTY | IP20 | IK08

Technical Data

General

Luminaire Wattage (W)	3
Weight (kg)	0.19
Operating Temperature (ta °C)	-20 to 50

Light Output

Lumens (lm)	240
Efficacy (lm/W)	80

LED

CCT (K)	3000K/4000K
CRI	80
Macadam Elipses	<5

Driver

Driver Current (mA)	120
Forward Voltage (V)	18

Electrical

Rated Input Current (A)	0.03
Power Factor (pf)	0.42
Input Voltage Range (VAC)	220-240
Inrush Current Peak (A)	110
Surge Protection (kV)	0.5kV
Conductor Size (mm)	0.5
Terminal Type	2 core flex

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting
Data Sheet


Order Code: XCTDL3CTSN

TRIANGLE CABINET LIGHT CC Cabinet/Shaver Lights 3W - 3000K-4000K

Dimensions

A (mm)	117
B (mm)	123
C (mm)	45

Line Drawing

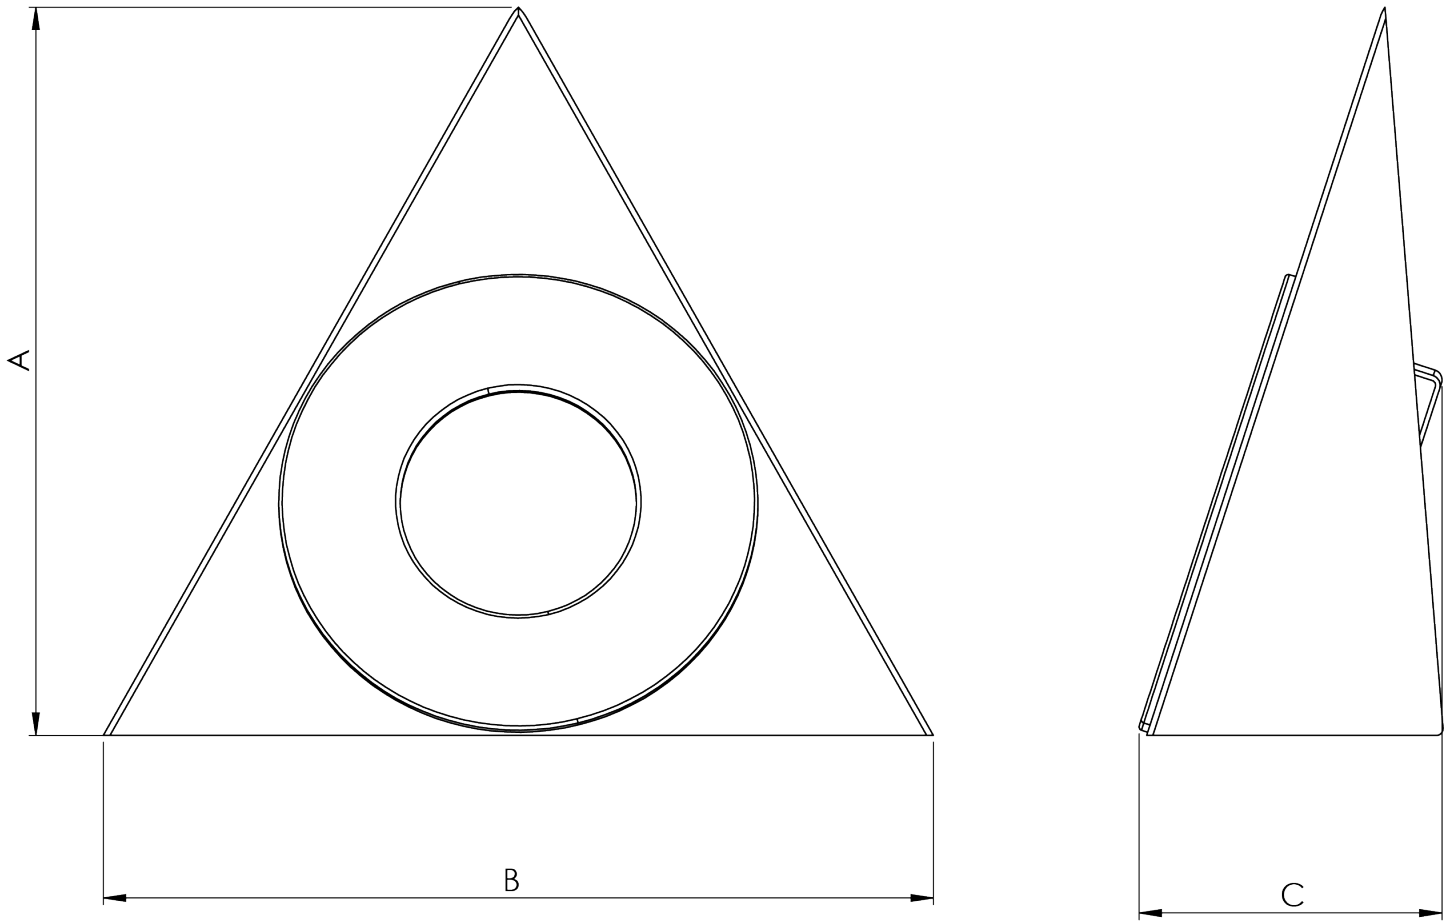

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Generated on: 12/11/2026 1:23pm
Produced by xcite LED Lighting