


**Order Code:** XCTDL3CTSN

TRIANGLE CABINET LIGHT CC Cabinet/Shaver Lights 3W - 3000K-4000K

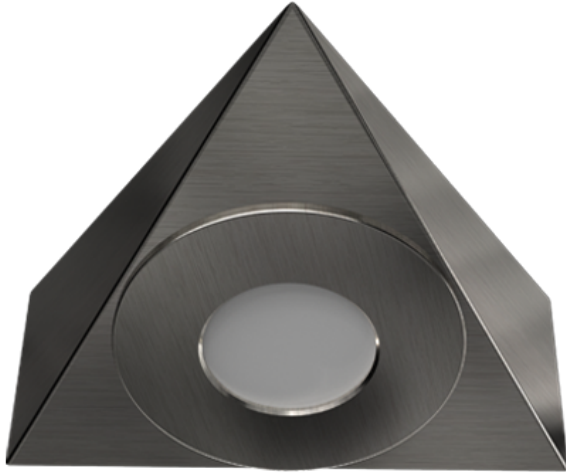

**Features**

- LED Triangular under cabinet downlight suitable for kitchen areas
- Surface mounted
- CCT selectable via 2-way selector switch [3000K/4000K]
- Complete with 1.5m of mains, 2 core cable

**Construction**

- Pressed steel body
- Frosted polycarbonate diffuser
- Integral driver circuitry with mains input



**Technical Data**

| General                       |             | Electrical                |             |
|-------------------------------|-------------|---------------------------|-------------|
| Luminaire Wattage (W)         | 3           | Rated Input Current (A)   | 0.03        |
| Weight (kg)                   | 0.19        | Power Factor (pf)         | 0.42        |
| Operating Temperature (ta °C) | -20 to 50   | Input Voltage Range (VAC) | 220-240     |
| <b>Light Output</b>           |             | Inrush Current Peak (A)   | 110         |
| Lumens (lm)                   | 240         | Surge Protection (kV)     | 0.5kV       |
| Efficacy (lm/W)               | 80          | Conductor Size (mm)       | 0.5         |
| <b>LED</b>                    |             | Terminal Type             | 2 core flex |
| CCT (K)                       | 3000K/4000K |                           |             |
| CRI                           | 80          |                           |             |
| Macadam Elipses               | <5          |                           |             |
| <b>Driver</b>                 |             |                           |             |
| Driver Current (mA)           | 120         |                           |             |
| Forward Voltage (V)           | 18          |                           |             |

**Order Code:** XCTDL3CTSN

TRIANGLE CABINET LIGHT CC Cabinet/Shaver Lights 3W - 3000K-4000K

Dimensions

|        |     |
|--------|-----|
| A (mm) | 117 |
| B (mm) | 123 |
| C (mm) | 45  |

Line Drawing

