xcite LED Lighting

Data Sheet

Order Code: XCTPANM3ST

XCITE TWINSPOT ST XCTPA 2W - 6500K - Fixed output - Emergency Self-test



Features

- Suitable for open areas and escape routes
- 20mm conduit side and rear cable entries for wall or ceiling fix
- High quality LED heads eliminate the need for replacement
- 2 LED heads with 54 LED SMD array
- Supplied with LiFePO4 battery

Construction

- Polycarbonate body
- Operates in non-maintained mode
- Integral auto self-test for reduced maintenance, includes a disable function

Technical Data

General

Luminaire Wattage (W)	2
Weight (kg)	1.16
Operating Temperature (ta °C)	5° to 25°

LED

CCT (K)	6500
CRI	70
Macadam Elipses	4.1

Driver

Driver Current (mA)	1200
Forward Voltage (V)	3.1

Emergency

Emergency Lumen Operating	600
Emergency Wattage (W)	2

Electrical

Rated Input Current (A)	0.05
Power Factor (pf)	0.2
Input Voltage Range (VAC)	220 to 240
Conductor Size (mm)	1.5
Terminal Type	3 pole piano key

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCTPANM3ST

XCITE TWINSPOT ST XCTPA 2W - 6500K - Fixed output - Emergency Self-test

Dimensions

A (mm)	300
B (mm)	290
C (mm)	65

Line Drawing

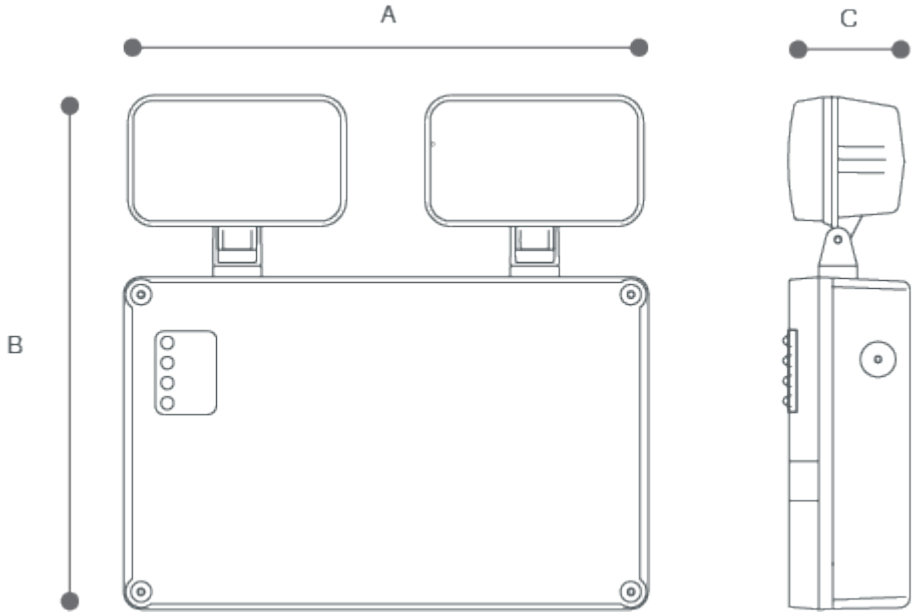

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk