xcite LED Lighting
Data Sheet

Order Code: XCUCL16CT

CABINET LIGHT CC Cabinet/Shaver Lights 16W - 3000K-4000K



Features

- Slimline profile for discreet installation
- CCT selectable via 2-way selector switch [3000K/4000K]
- Up to 125 lumens per watt efficacy

Construction

- Extruded plastic body
- LED SMD modules array

3000K 4000K | 50,000 HOURS | 3YRS WARRANTY | IP20 | IK05 | IK06

Technical Data

General

Luminaire Wattage (W)	16
Weight (kg)	0.27
Operating Temperature (ta °C)	0 to 25

Light Output

Lumens (lm)	2000
Efficacy (lm/W)	125

LED

CCT (K)	3000K/4000K
CRI	80
Macadam Elipses	5

Driver

Driver Current (mA)	205
Forward Voltage (V)	72

Electrical

Rated Input Current (A)	0.08
Power Factor (pf)	0.9
Input Voltage Range (VAC)	220-240
Inrush Current Peak (A)	5
Surge Protection (kV)	0.5
Conductor Size (mm)	0.5 to 2.5
Terminal Type	2 core flex

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCUCL16CT

CABINET LIGHT CC Cabinet/Shaver Lights 16W - 3000K-4000K

Dimensions

A (mm)	1157
B (mm)	23
C (mm)	37

Line Drawing

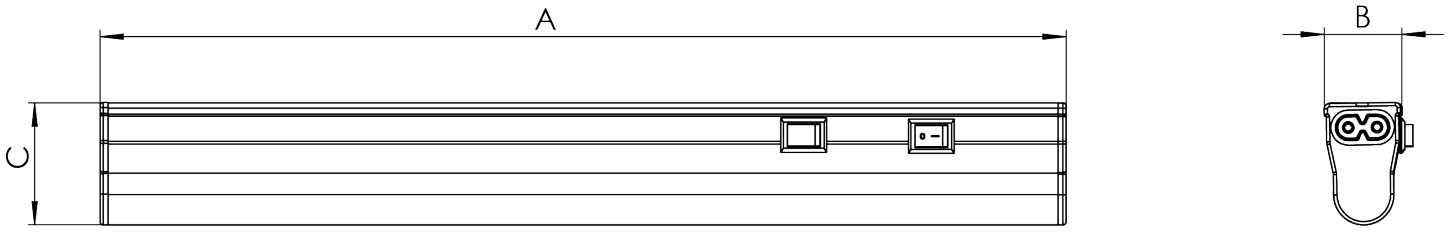

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Generated on: 12/11/2026 1:23pm
Produced by xcite LED Lighting