# xcite LED Lighting
## Data Sheet

**Order Code:** XCUD15WWG

5W - Decorative Wall Light - One-Way [Down] - IP54 - 3000K - Anthracite Grey



### Features

- Decorative one-way [down] wall light suitable for domestic use
- Suitable for exterior use and walkways
- Low energy LED module for reduced running costs
- Up to 60 lumens per watt efficacy

### Construction

- Die-cast aluminium body
- Supplied as standard with warm white [3000K] LED

## Technical Data

### General

| | |
|---|---|
| Luminaire Wattage (W) | 5 |
| Weight (kg) | 0.56 |
| Operating Temperature (ta °C) | 0 to 25 |

### Light Output

| | |
|---|---|
| Lumens (lm) | 300 |
| Efficacy (lm/W) | 60 |

### LED

| | |
|---|---|
| CCT (K) | 3000 |
| CRI | 80 |
| Macadam Elipses | 4 |

### Driver

| | |
|---|---|
| Driver Current (mA) | 300 |

### Electrical

| | |
|---|---|
| Rated Input Current (A) | 0.03 |
| Power Factor (pf) | 0.7 |
| Input Voltage Range (VAC) | 230 |
| Inrush Current Peak (A) | 15 |
| Conductor Size (mm) | 1.5 |
| Terminal Type | 3 pole screw down |

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

# xcite LED Lighting

## Data Sheet


**Order Code:** XCUD15WWG

5W - Decorative Wall Light - One-Way [Down] - IP54 - 3000K - Anthracite Grey

### Dimensions

| | |
|---|---|
| A (mm) | 120 |
| B (mm) | 85 |
| Dia. (mm) | 78 |

### Line Drawing

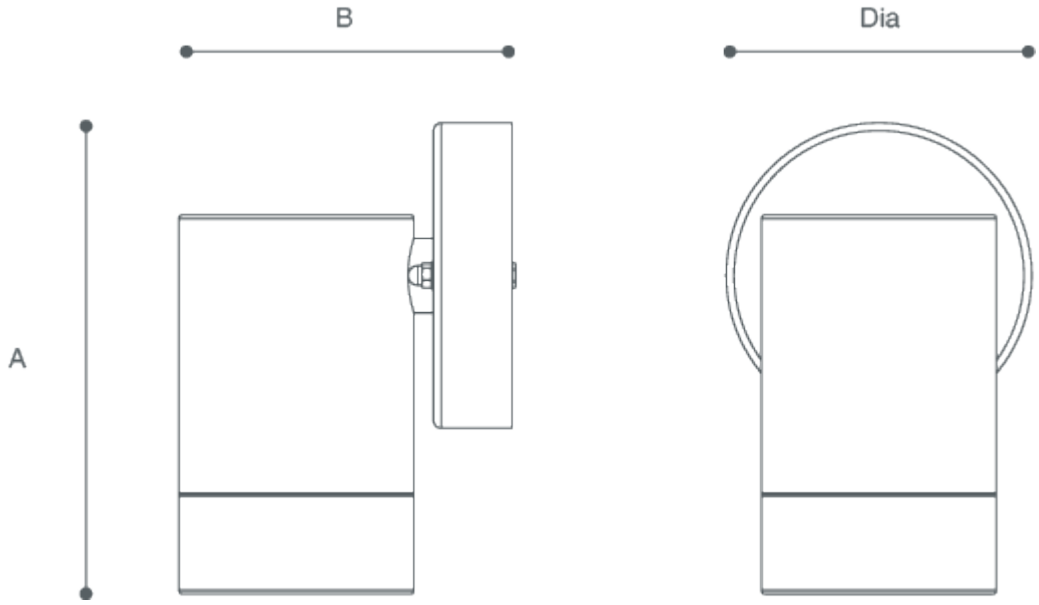


Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk