xcite LED Lighting
Data Sheet

Order Code: XCUD15WWSS

5W - Decorative Wall Light - One-Way [Down] - IP54 - 3000K - Stainless steel



Features

- Decorative one-way [down] wall light suitable for domestic use
- Suitable for exterior use and walkways
- Low energy LED module for reduced running costs
- Up to 60 lumens per watt efficacy

Construction

- Die-cast aluminium body
- Supplied as standard with warm white [3000K] LED

Technical Data

General

Luminaire Wattage (W)	5
Weight (kg)	0.54
Operating Temperature (ta °C)	0 to 25

Light Output

Lumens (lm)	300
Efficacy (lm/W)	60

LED

CCT (K)	3000
CRI	80
Macadam Elipses	4

Driver

Driver Current (mA)	300

Electrical

Rated Input Current (A)	0.03
Power Factor (pf)	0.7
Input Voltage Range (VAC)	230
Inrush Current Peak (A)	15
Conductor Size (mm)	1.5
Terminal Type	3 pole screw down

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCUD15WWSS

5W - Decorative Wall Light - One-Way [Down] - IP54 - 3000K - Stainless steel

Dimensions

A (mm)	120
B (mm)	85
Dia. (mm)	78

Line Drawing

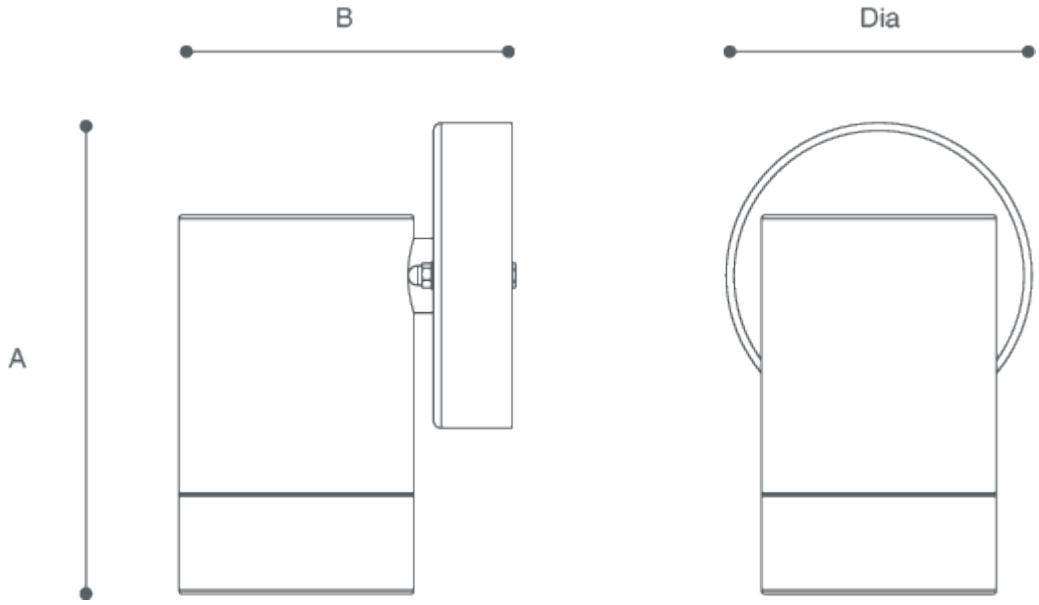

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk