xcite LED Lighting
Data Sheet

Order Code: XCUD210WWG

10W - Decorative Wall Light - Up/Down - IP54 - 3000K - Anthracite Grey



Features

- Decorative up/down wall light suitable for domestic use
- Low energy LED module for reduced running costs
- Up to 70 lumens per watt efficacy

Construction

- Die-cast aluminium body
- Supplied as standard with warm white [3000K] LED

Technical Data

General

Luminaire Wattage (W)	10
Weight (kg)	0.83
Operating Temperature (ta °C)	0 to 25

Light Output

Lumens (lm)	700
Efficacy (lm/W)	70

LED

CCT (K)	3000
CRI	80
Macadam Elipses	4

Driver

Driver Current (mA)	250

Electrical

Rated Input Current (A)	0.04
Power Factor (pf)	0.9
Input Voltage Range (VAC)	230
Inrush Current Peak (A)	30
Conductor Size (mm)	1.5
Terminal Type	3 pole screw down

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

xcite LED Lighting

Data Sheet


Order Code: XCUD210WWG

10W - Decorative Wall Light - Up/Down - IP54 - 3000K - Anthracite Grey

Dimensions

A (mm)	163
B (mm)	85
Dia. (mm)	78

Line Drawing

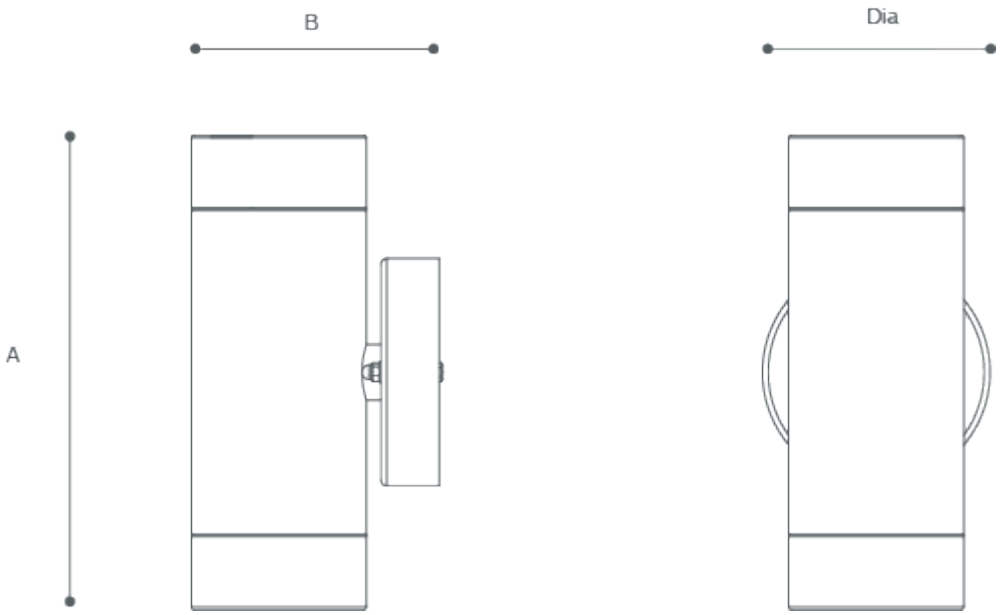

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk