
# xcite LED Lighting
## Data Sheet

**Order Code:** XCCDL3CTW

CIRCULAR CABINET LIGHT CC XCCDL - White - 3W - 3000K-4000K - Fixed output

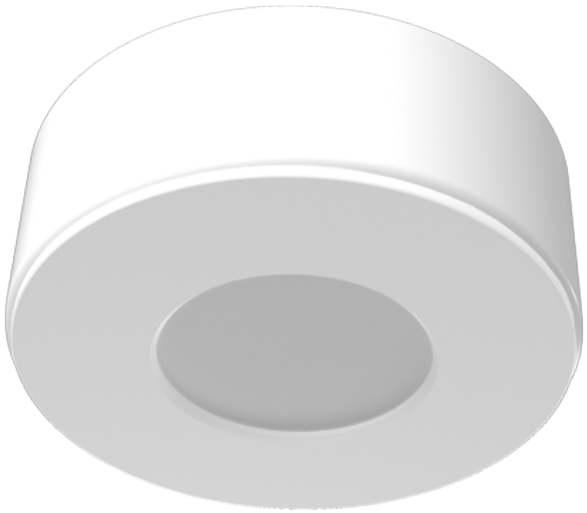

### Features

- Suitable for kitchen or wardrobe applications
- LED circular under cabinet downlight
- Can be surface or flush/recessed mounted
- Complete with 1.5m of mains, 2 core cable
- CCT selectable via 2-way selector switch [3000K/4000K]

### Construction

- Pressed steel body
- Frosted polycarbonate diffuser
- Integral driver circuitry with mains input

3000K 4000K | 50,000 HOURS | 3YRS WARRANTY | IP20 | IK08

## Technical Data

### General

| | |
|---|---|
| Luminaire Wattage (W) | 3 |
| Weight (kg) | 0.17 |
| Operating Temperature (ta °C) | -20 to 50 |

### Light Output

| | |
|---|---|
| Lumens (lm) | 240 |
| Efficacy (lm/W) | 80 |

### LED

| | |
|---|---|
| CCT (K) | 3000K/4000K |
| CRI | 80 |
| Macadam Elipses | <5 |

### Driver

| | |
|---|---|
| Driver Current (mA) | 120 |
| Forward Voltage (V) | 18 |

### Electrical

| | |
|---|---|
| Rated Input Current (A) | 0.03 |
| Power Factor (pf) | 0.42 |
| Input Voltage Range (VAC) | 220-240 |
| Inrush Current Peak (A) | 110 |
| Surge Protection (kV) | 0.5kV |
| Conductor Size (mm) | 0.5 |
| Terminal Type | 2 core flex |

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

# xcite LED Lighting

## Data Sheet


**Order Code:** XCCDL3CTW

CIRCULAR CABINET LIGHT CC XCCDL - White - 3W - 3000K-4000K - Fixed output

### Dimensions

| | |
|---|---|
| C (mm) | 27 |
| Fix | 48 |
| Dia. (mm) | 73 |

### Line Drawing

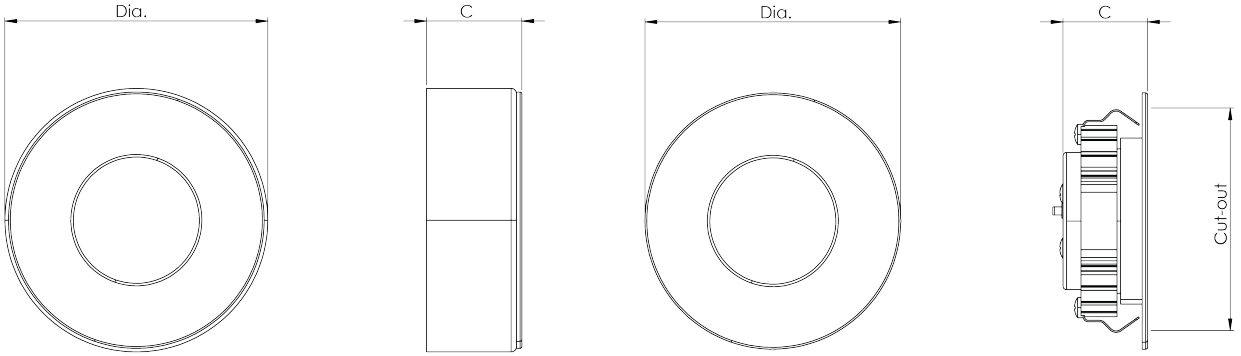


Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk