xcite LED Lighting

Data Sheet

Order Code: XCSEDLA1NM3CST

XCITE EM SURFACE DOWNLIGHT ST XCSEDLA - 6500K - Fixed output - non-maintained Emergency Self-test corridor optic



Features

- Suitable for open areas and escape routes
- 20mm conduit side and rear cable entries
- Virtually service free emergency lighting
- Easy to install with simple connection wiring
- Supplied with LiFePO4 battery

Construction

- Very low energy consumption - 1W
- Polycarbonate body
- Operates in non-maintained mode
- Internal mains connection
- Integral auto self-test for reduced maintenance

50,000 HOURS | 3YRS WARRANTY | IP20 | IK06 | LiFePO4

Technical Data

General

Luminaire Wattage (W)	2
Weight (kg)	0.30
Operating Temperature (ta °C)	5° to 25°

LED

CRI	70
Macadam Elipses	3.9

Driver

Driver Current (mA)	350
Forward Voltage (V)	3.1

Emergency

Emergency Lumen Operating	130
Emergency Wattage (W)	1

Electrical

Rated Input Current (A)	0.02
Power Factor (pf)	0.19
Input Voltage Range (VAC)	220 to 240
Conductor Size (mm)	1.5
Terminal Type	3 pole screw down

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

CE UKCA

xcite LED Lighting

Data Sheet


Order Code: XCSEDLA1NM3CST

XCITE EM SURFACE DOWNLIGHT ST XCSEDLA - 6500K - Fixed output - non-maintained Emergency Self-test corridor optic

Dimensions

A (mm)	170
B (mm)	120
C (mm)	45

Line Drawing

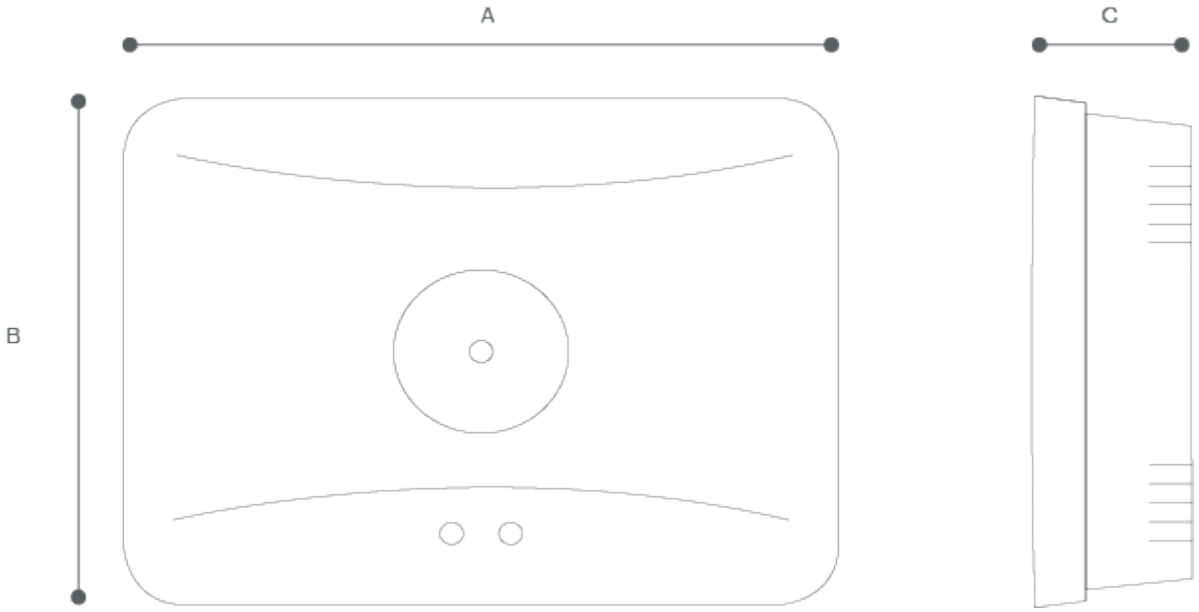

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk